



MAIN STREET

PLAN
SCALE: 1" = 20'

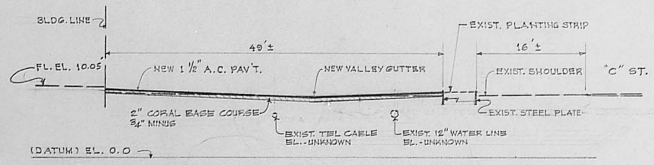

SECTION "A-A"
SCALE: 1" = 10'



LOCATION PLAN
NOT TO SCALE

LEGEND

FE	FINISHED ELEVATION
EE	EXISTING ELEVATION
P.P.	POWER POLE
C.C.M.	CONC. CABLE MARKER
	EXISTING STRUCTURES

NOTES

1. Grade the shaded area and form the valley gutter.
2. Spread graded coral base course 3/4" minus and compact to 2" thickness.
3. Prime coral base and pave with 1 1/2" AC in accordance with the given finished elevations and Sec. A-A. Area to be paved equals 1,620 sq. yds.
4. Provide a 4" thick U-shape concrete enclosure 18" x 18" x 12" for the water valve near the shop building. Embed concrete 6" and expose 6" above new paving.
5. Install standard guard rail, Type A, for the existing fire hydrant. For details see MA DWG No. 0937.
6. Remove two existing signs and reset in place after paving.

(A)

A	(1) BUSHED INSTALLATION IN W. GUARD RAIL AS PER REF. REQUEST	5/16/46	JFK
SYMBOL	DESCRIPTION	DATE	APPROVAL
REVISIONS			
PWC DRAWING NO.	DEPT. OF THE NAVY BUREAU OF YARDS & DOCKS	11273	
DESIGNER	PUBLIC WORKS CENTER GUAM, M.I.	SHIP REPAIR FACILITY GUAM, M.I.	
DRWN	CY. VILLEGAS	PAVING	
CHK		CARPENTERS SHOP AREA	
DIV DIR			
DEPT HEAD			
WR NO.	APPROVED	DATE	
A 3035-R	<i>R. L. Jones</i>	20 May 1946	
COMMANDING OFFICER			
SATISFACTORY TO ACTIVITY	SCALE	SPEC 13438/60	
DATE 19 APR. 1950	SHEET OF 1	NB 13738	
	Y&D DRAWING NO.	857-548	

SURVEYED BY: SEVILLA & PARTY
FIELD BOOK NO. LL 8 510
DATE 19 APR. 1950

SIGNATURE *R. L. Jones*
DATE 22 APR 1950

TO Y&D FILE