


REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED

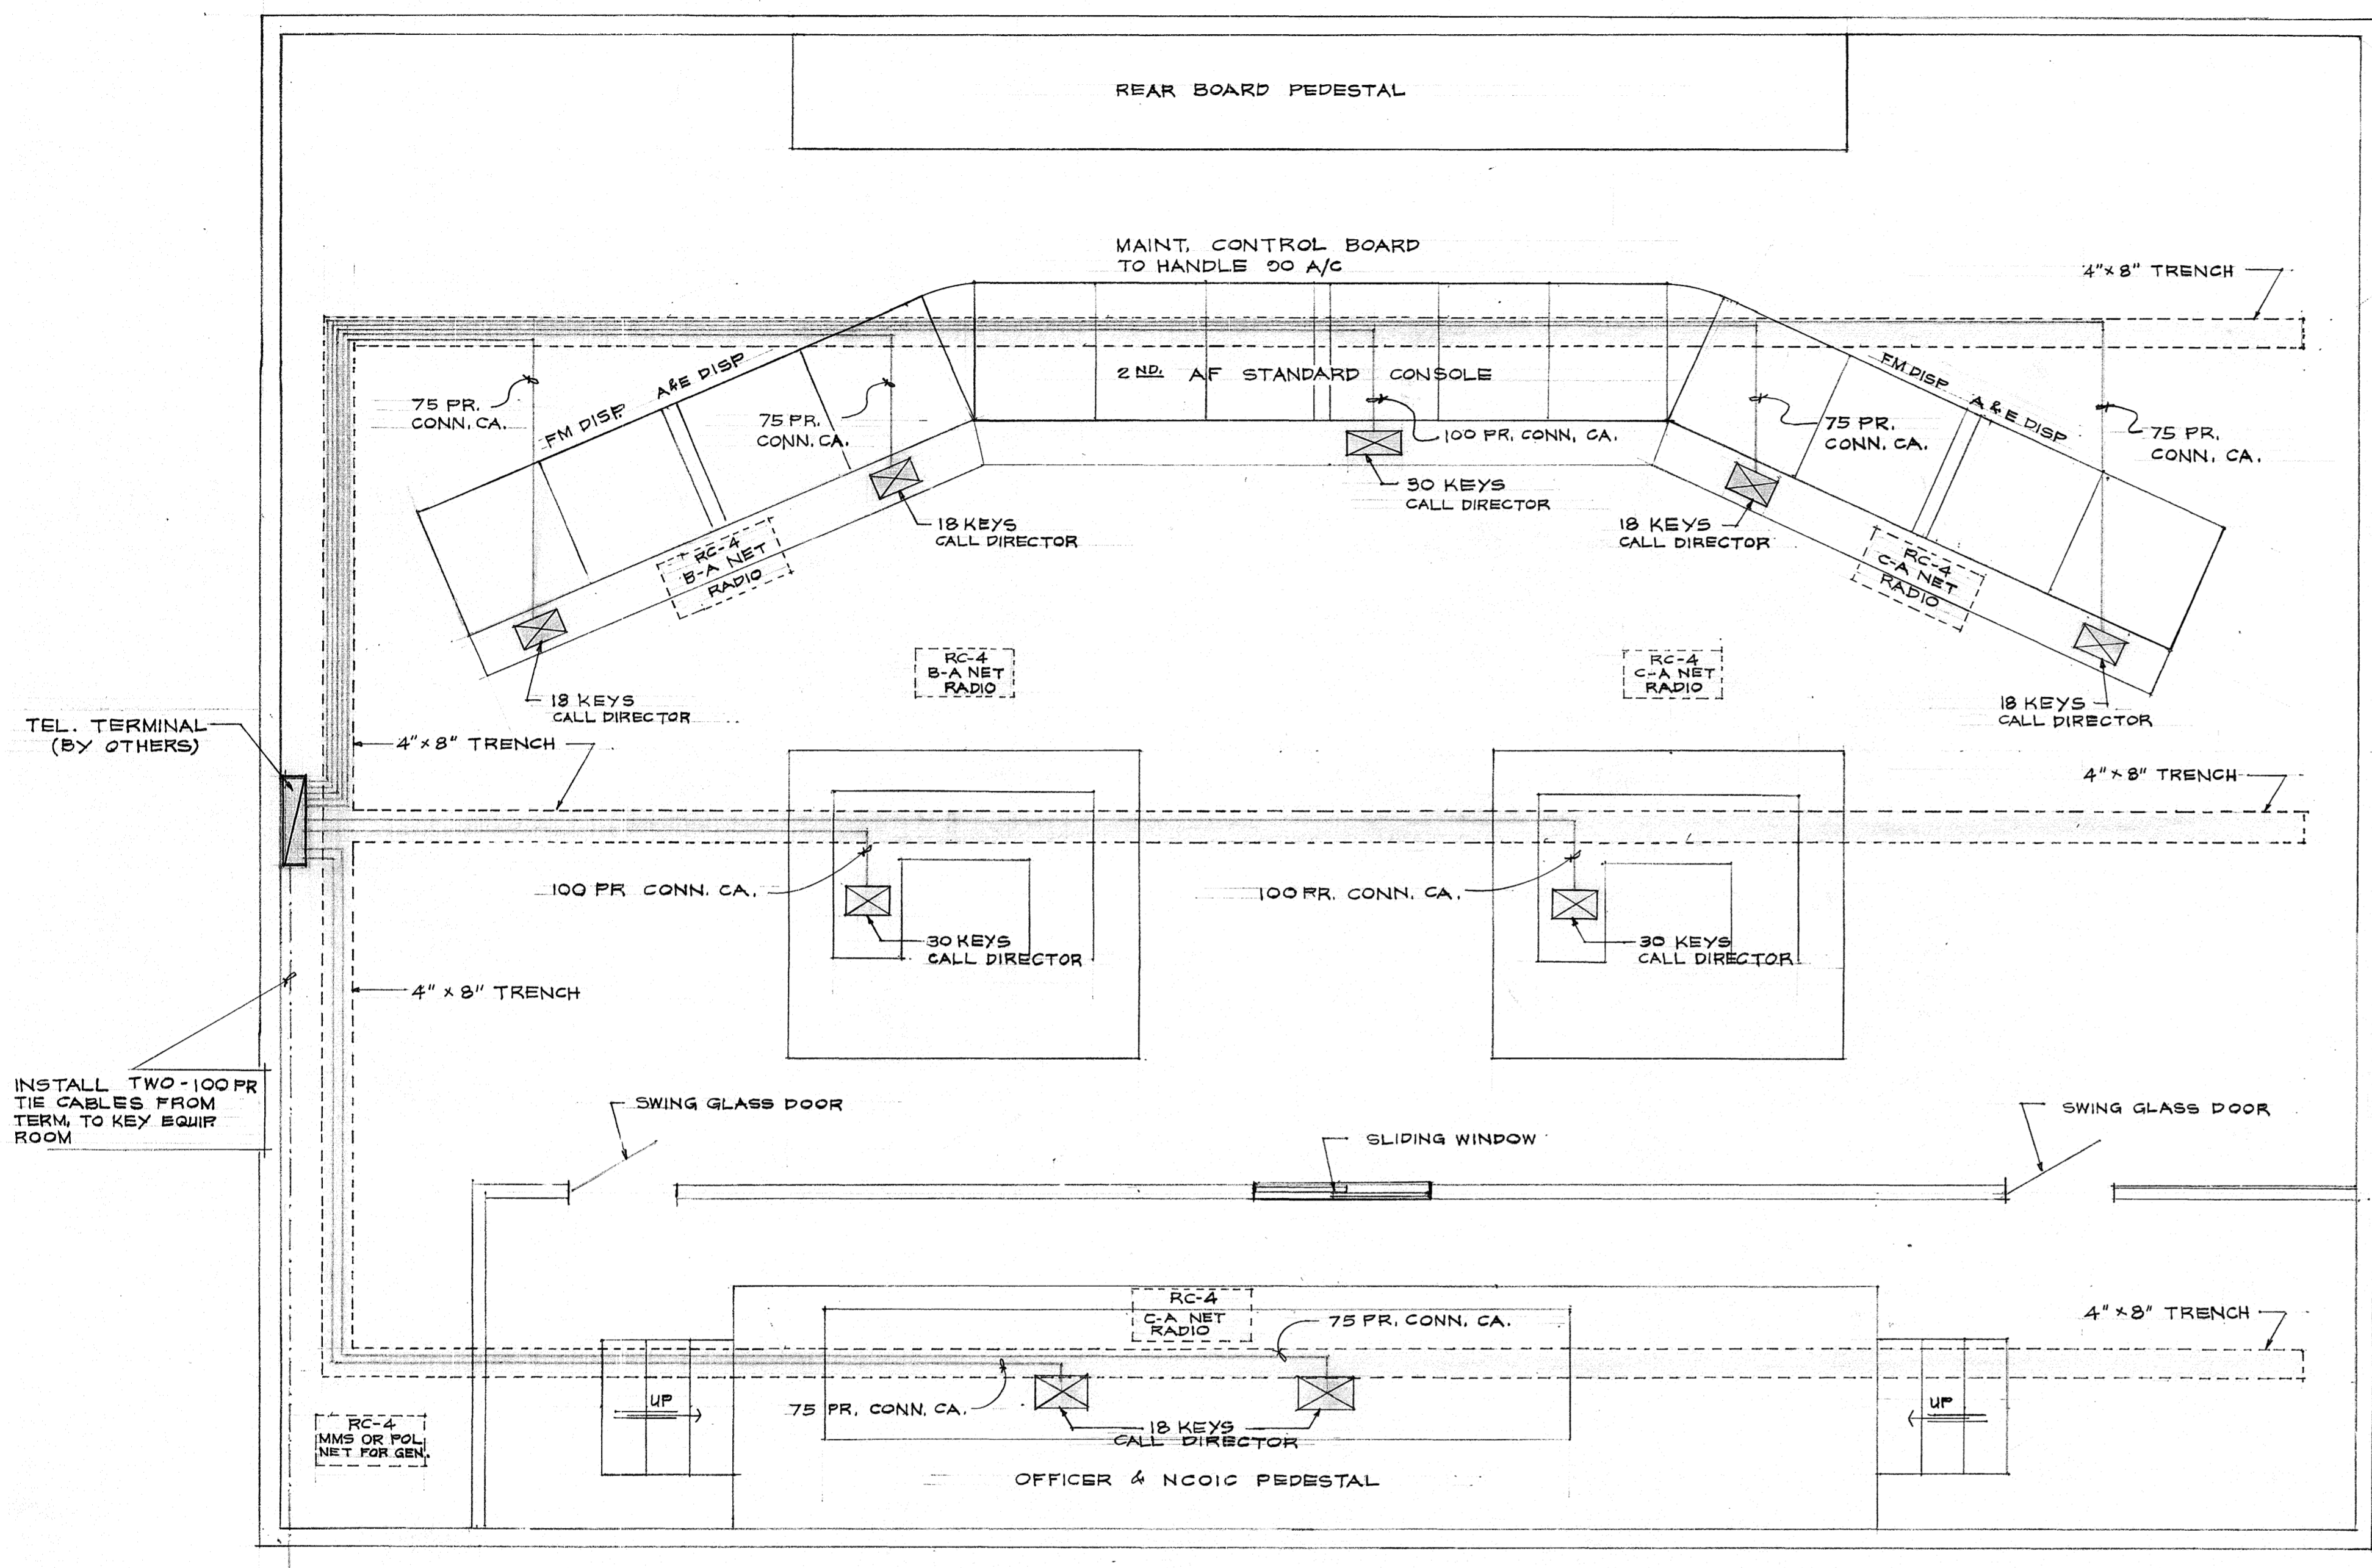

INSTRUMENTS LAYOUT
SCALE: NONE

NOTES

- ALL EQUIPMENT AND MATERIALS WILL BE FURNISHED BY AIR FORCE.
1. INSTALL UPRIGHT EQUIPMENT CABINET IN EQUIPMENT ROOM. INSTALL AND TERMINATE KEY UNITS AS NOW OPERATING IN EXISTING CABINETS. TERMINATE 100 PR. CABLES FROM NEW JOB CONTROL ROOM IN DIRECT CIRCUIT MULTIPLE AS IN PRESENT CONTROL ROOM.
 2. IN NEW JOB CONTROL ROOM TERMINATE TWO-100 PR. CABLES IN TERMINAL CABINET ON 2G PR. I.W. TERMINALS. TERMINATE ALL CONNECTOR CABLES AS PER LINE PICKUP ASSIGNMENTS FURNISHED BY JOB CONTROL PERSONNEL.
 3. REMOVE EXISTING GA KEY EQUIPMENT. RETAIN FOR REINSTALLATION.

- 0 - C.O. CONNECTOR LINES (238 UNITS).
- 3 - C.O. DIRECT LINES.
- 29 - KEY SYSTEM, DIRECT LINES (58-203 UNITS).
- 22 - STATIONS, KEY SYSTEM DIAL INTERCOMM.

DES. <i>P. J. ...</i>	DEPARTMENT OF THE NAVY BUREAU OF YARDS & DOCKS		
DRAWN <i>G. G. ...</i>	PUBLIC WORKS CENTER		
CHK <i>...</i>	GUAM, M. I.		
DIV. DIR. <i>...</i>	AAFB	GUAM, M.I.	
DEPT HEAD <i>...</i>	BLDG # 1800G		
PL OFF <i>...</i>	INSTALLATION OF GA KEY SYSTEM		
WR NO 1210047	JOB CONTROL		
APPROVED <i>...</i>	DATE <i>...</i>	CODE IDENT NO 80091	SIZE D
COMMANDING OFFICER		PWC DRAWING NO 13921	
SCALE <i>None</i>	SPEC NB	SHEET 1 OF 1	